


## PRODUCT INFORMATION TM58/6

## Conference Microphone

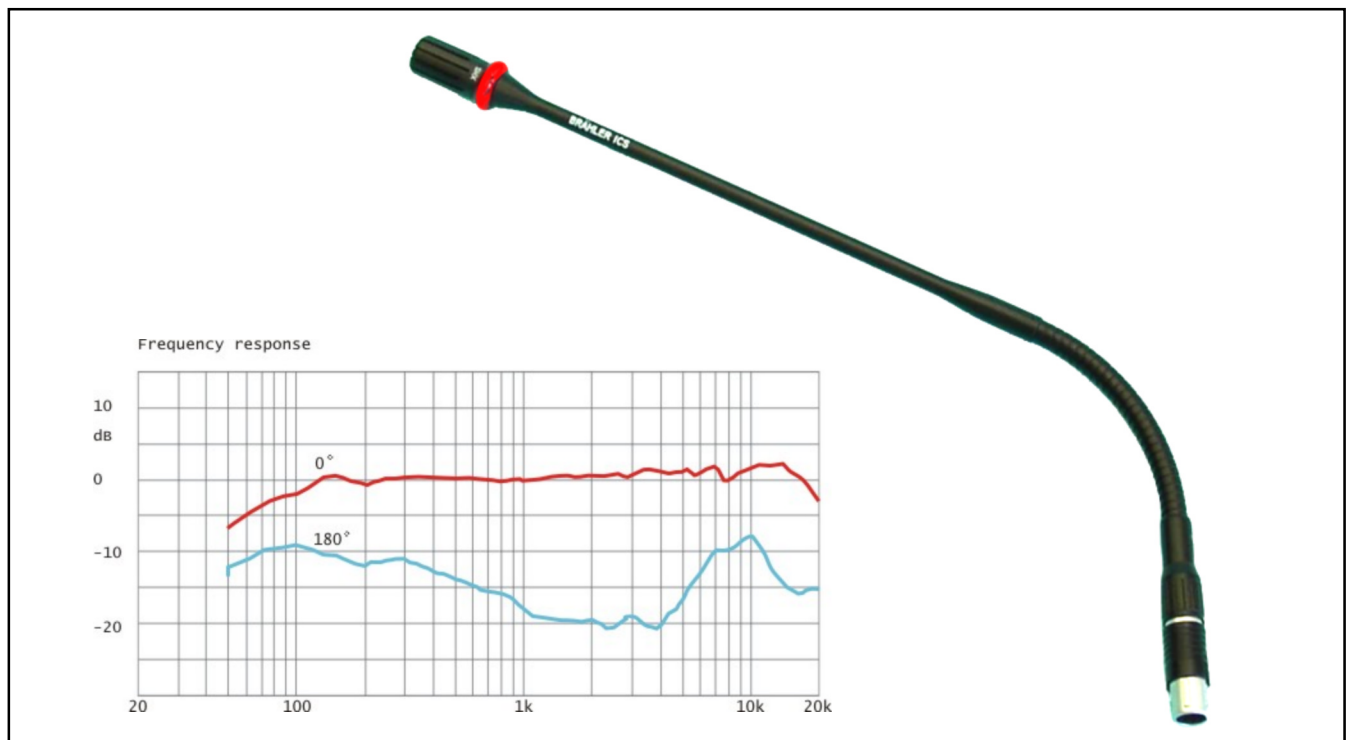

BRÄHLER ICS is committed to continually improving its products and so reserves the right to make technical modifications without notice.

### Description

Professional electret microphone with ON status light ring indicator. Rigid microphone neck with gooseneck hinge and high quality connector (MINICON Neutrik), matt black finish.

### Technical Data

Complies with international standard IEC914

#### Transducer Principle

Electret condenser

#### Directivity

cardioid

#### Frequency Response

30 Hz ... 20.000 Hz  
see diagram

#### Sensitivity (free field, no load, 1 kHz)

-43 dB (0dB = 1V/Pa)

#### Output Impedance

1 kOhm

#### Max. SPL (Signal pressure level)

120 dB

#### Signal-to-noise Ratio

>68 dB (A-weighted, 1kHz)

#### Operating Voltage

5 VDC (1.5V ... 9V)

#### Indicator ring

colour red

Nominal current 20 mA (50 mA max.)

#### Connector

Neutrik Minicon

#### Dimensions

Total length 360 mm  
dia 17.5 mm

#### Weight

80 g

### Accessories

Wind screen (included in delivery)

WPF.01.0560.E.040324